# 5-Port PoE High Power Switch with 4 PoE Ports and 1 Uplink Port (ONV-POE34001P)

#### 5-Port PoE Switch (ONV-POE34001P)















- ◆Can supply power to network surveillance cameras that without PoE function
- ◆5x 10/100Mbps auto-sensing RJ45 ports, 4x 10/100Mbps PoE ports, 1x uplink port
- ◆Supports port auto-flip (Auto MDI/ MDIX)
- ◆External power supply 70W in total.
- ◆1x high power PoE port with maximum power: 60W
- ◆Maximum power of other PoE ports: 15.4W
- ◆Adopts store-and-forward architecture
- ◆ IEEE 802.3af power on up to 4 ports
- ◆Features with fan-less, natural cooling, small, compact and quiet design, suitable for desktop or wall

#### Product Description

This ONV-POE34001P switch provides a network point for power supply and data transmission. All the 5 Ethernet ports can be connected with 10/100Mps quickly, and the uplink port is Ethernet interface, among which 1-4 port can provide standard IEEE 802.3af power supply. Due the advanced self-sensing algorithm supply power for IEEE802af terminal unit only, there is no need to worry about damaging proprietary PoE or non-PoE standard equipment. In addition, it will stop power supply when PoE devices are not connected. In short, The ONV-POE34001P features simple and reliable design, automatic identification PoE requirements, duplex and high-speed.


This cost-effective ONV-POE34001P provide network layout need to simplify wireless access point (AP) and IP-based surveillance cameras network cameras in order to install in commercial network and home network. The devices far away from power socket are very suitable for hanging on the wall or ceiling. PoE eliminates the need for connecting these devices to power socket. So it make more flexible for those difficult to connect with AC power socket, and cut down the installation cost. It is ideal choice for those want to deploy a small commercial network and home network that use wireless access point (AP) and IP-based surveillance cameras.




# **Technical Specification**

Product Name	5-Port High Power PoE Switch with 4 PoE Ports and 1 Uplink Port
Product Model	ONV-POE34001P
Connector	5x 10/100M copper cable RJ45 ports(all ports support MDI/MDIX)
	4x PoE ports(1x 60W included) + 1 Uplink
Transfer Mode	Store-And-Forward
Network Medium	10BASE-T: Cat3,4,5 UTP(≤100 meter)
	100BASE-TX: Cat5 or more UTP (≤100 meter)
	Data transmission distance: 100m
Performance Specifications	Bandwidth: 1.6Gbps (non-blocking)
	Network Latency (100 to 100M bps): maximum delay less than 20
	microseconds
	Packet Buffer Memory: 96KB
	Address Database Size: 1,000
	MTBF: 190,000 hours (about 21 years)
Network Protocols and Standards	IEEE 802.3i 10BASET
	IEEE 802.3u 100BASETX
	IEEE 802.3x Flow Control
	IEEE 802.1af DTE Power via MDI
	IEEE 802.3af
LEDs Status	System: power supply
	Every Port: connecting, PoE working status
	Maximum PoE power in total: 70W
Power	Power for each PoE port:15.4 W, port#1 support max 60W high power
	Power input: AC100-240V 50/60Hz; (every country use a custom power plug)
Dimensions/Weight	Dimensions: 185X113X36mm, 0.4kg
Differsions/weight	·
Working Environment	Operating Temperature: -20° ~ 55 ° C
	Storage Temperature: -30 ° ~ 75 ° C
	Operating Humidity: 10% ~ 90%, non-condensing
Radiation	CE mark, commercial
	FCC Part 15 Class B
	VCCI Class B
	EN 55022 (CISPR 22), Class B
Safety	CE Mark ,commercial
	CE/LVD EN60950, RoHS
Warranty	1 year warranty (2 yeas warranty for power adapter)

# Product Size Display

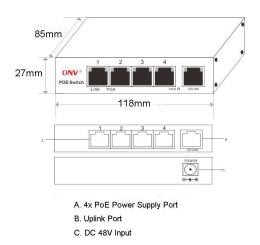

# Product Usage Display

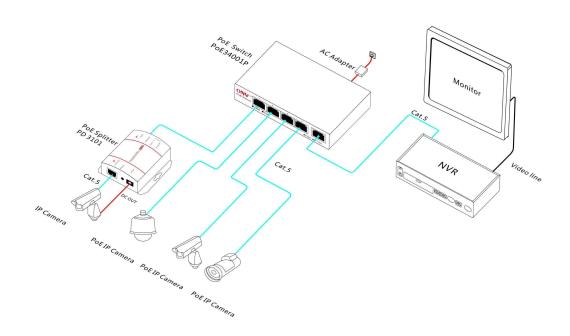

#### 5-Port High Power PoE Switch (ONV-POE34001P)

### Product Ordering Information

Product Model: ONV-POE34001P

Product Description: 5x 10/100M Ethernet ports with 4x PoE ports PoE switch, among which

there are 1 port supports super high power with 60W. Total power is 70W. **Ordering Notes:** PoE default power supply is end-span (1/2, 3/6 line pair).

Alternative PoE Power supply is mid-span (4/5, 7/8 line pair)

## **Product Packing Lists**

	5-Port PoE Switch with 4 PoE Ports and 1 Uplink Port (ONV-POE34001P)	
Packing	Power Adapter	
Lists	User Guide	
	Warranty Card	

