

26-Port Gigabit PoE Switch with 24 Gigabit PoE Ports and 2 Gigabit Fiber Ports 15.4W (POE33024PF)

26-Port Gigabit PoE Switch with 24 Gigabit PoE Ports



- ◆ Supply power to 5 classes Ethernet wireless access point (AP) and network surveillance cameras (PoE)
- ◆ Port1 to Port24 compatible with IEEE802.3af standard power Supply (Maximum power of each port is 15.4W)
- ◆ 24x 10/100 /1000Mbps automatic adjustment RJ45 PoE ports, 2x 10/100 /1000Mbps SFP fiber uplink ports
- ◆ Meets the standards of the IEEE 802.3af/ IEEE 802.3/ IEEE 802.3u/ IEEE 802.3x/ IEEE 802.3ab standard
- ◆ The packet forwarding speed of the wire-speed port is 1.488Mbps
- ◆ Network port has lightning-proof function (AC power port: differential mode +/-2kV, common mode +/-4kV)
- ◆ All ports support wire-speed switching, frame size within the range of 64 to 1536 can achieve wire-speed
- ◆ 1U Rack mounted design, easy to install and use
- ◆ Automatic adjustment, plug and play, no need software and protocol conversion
- ◆ QOS, RSTP, IGMP; RADIUS and 802.1X certification

Product Description


The 26-Port gigabit PoE ports provide fast connection to servers or the backplane of the gigabit speed. It features with PoE (Power Over Ethernet) function through different power levels of PoE power supply, that is it can supply the 48V DC power to the PD remote devices (e.g. IP Phone, WLAN AP, Security, Bluetooth AP etc.) via a network cable, in order that realizing the power supply for remote PD devices. As the power supply PSE (Power Sourcing Equipment) side device, which supports the standard IEEE802.3af power standard and single-port power is 15.4W.

This cost-effective POE33024PF is perfectly suitable for security surveillance/ small business/ home use. It comes with excellent lightning-proof capabilities and security features. The product adopts the standard rack metal housing design and is easy to install. POE33024P is fully compliant with IEEE802.3af/ IEEE802.3 10BASE-T Ethernet/ IEEE802.3u 100BASE-TX fast Ethernet/ IEEE 802.3ab 1000BASE-T Ethernet ANSI/IEEE802.3NWay auto-negotiation and IEEE802.3x flow control. This POE33024P comes with the PoE green power saving application mode.

Technical Specification


Product Name	26-Port Gigabit PoE Switch with 24 Gigabit PoE Ports 15.4W
Product Model	POE33024PF
Connector Type	24x 10/100/1000M copper cable RJ45 PoE ports(All ports support MDI/MDIX automatic adjustment); 2x 10/100 /1000Mbps SFP fiber uplink ports
Forwarding Mode	1000M line speed forwarding; Packet Length: 10K; Packet Buffer: 4.1M
Network Medium	10BASE-T: Cat3,4,5 UTP(≤100 meters) 100BASE-TX: Cat5 or more UTP(≤100 meters) 1000BASE-TX: Cat5 or more UTP(≤100 meters)
Performance Specifications	Backplane Bandwidth: 52Gbps Network Delay: less than 20 microsecond Packet Buffer: 96KB Address Database size: 1000 MTBF: 190,000 hours (about 21 years)
PoE Description	IEEE 802.3af, each port power is 15.4W; Port1 to Port24 support PoE power; The even number Port(1/3/5/7/9/11/13/15/17/19/21/23) is end-span(1/2+, 3/6-line pair) power supply, the odd number port(2/4/6/8/10/12/14/16/18/20/22/24) is mid-span(4/5+, 7/8- line pair) power supply
PoE Power	Port output power is 15.4W (IEEE802.3af)
Power Supply Type	End-span type(Mid-span optional)
Network Protocols	IEEE 802.3; IEEE 802.3u; IEEE 802.3ab; IEEE 802.x Flow Control
LED Indicator Status	Power, Network, PoE working status
Power	IEEE802.3af standard, each port power is 15.4W, total power is 440W
Voltage	Input: AC100~240V 50/ 60Hz
Dimension/ Weight	Dimension (LxWxH): 440 x 275 x 44.5mm; Weight:4.6kg
Working Environment	Working temperature: -20°C ~ 75°C; Storage temperature: -40° ~ 85°C; Working Humidity: 10% ~ 90%, no condensation; Storage Humidity: 5% ~ 90%, no condensation; Working Altitude: 3000 meters (10,000ft); Storage Altitude: 3000 meters (10,000ft)
Radiation	CE mark, commercial FCC Part 15 Class B VCCI Class B EN 55022 (CISPR 22), Class B
Safety	CE Mark ,commercial CE/LVD EN60950,RoHS
Warranty	1 Year Warranty, Life-time Maintenance

Product Size Display

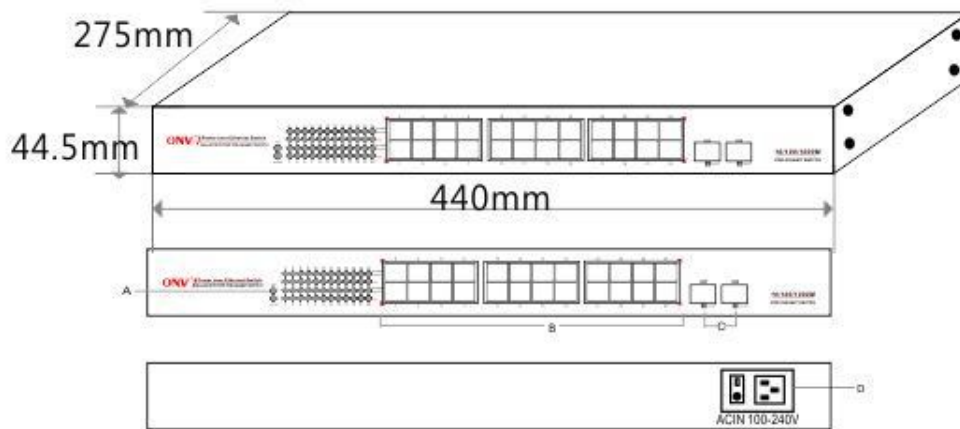

- A. Working Status Light
- B. 24x Gigabit PoE Ports
- C. SFP Fiber Port
- D. AC100-240V, 50/60Hz Input Port

Product Application Display

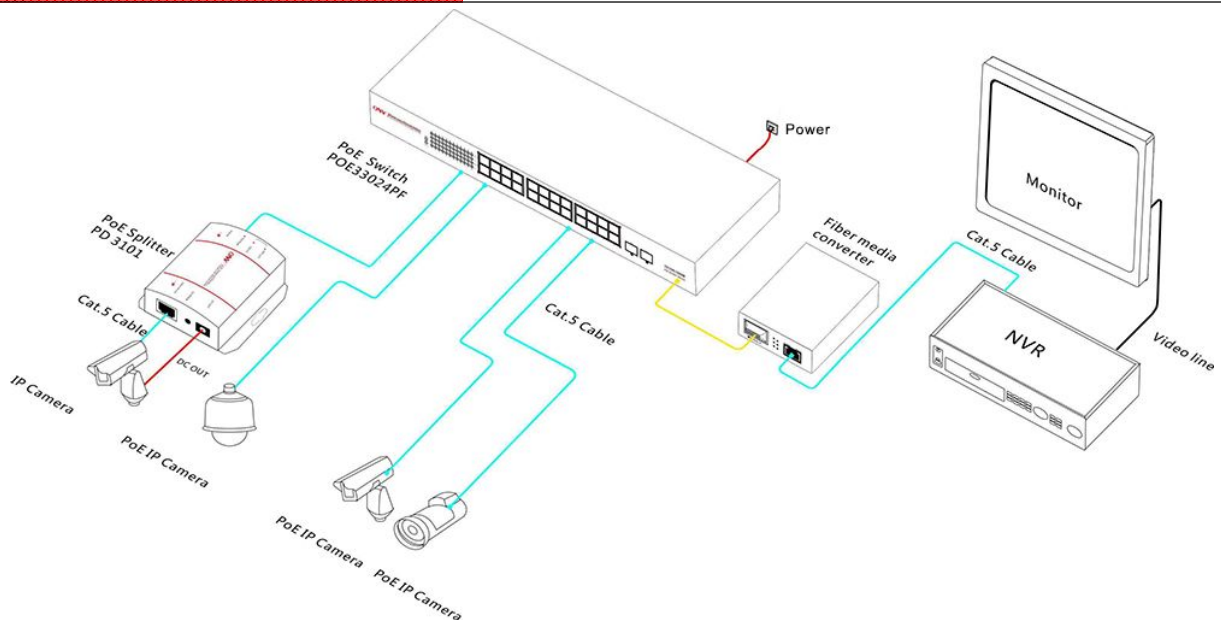

Product Ordering Information

Product Model: POE33024PF

Product Description: 26-Port gigabit PoE switch with 24 gigabit PoE ports and 2x gigabit SFP fiber ports; port1 to port24 supports POE IEEE 802.3af international standard, each port power is 15.4W, the total power is 440W

Ordering Note: The even number port is end-span(1/2+, 3/6- line pair) power supply, the odd number port is mid-span(4/5+, 7/8- line pair) power supply

Product Packing Lists

Packing Lists	26-Port Gigabit PoE Switch with 24 Gigabit PoE Ports 15.4W (POE33024PF)
	Power Adapter Cable
	User Guide
	Warranty Card